

Thank you for purchasing your new SKIMZ Protein Skimmer that provides optimum performance with maximum safety and reliability.

Model	Body Diameter (mm)	Skimmer Pump	Total Watts	For Aquarium	Code
SH 1	L85 x D85 x H410mm	Skimz SAP1200	7	up to 200 L	8033-00
SH 2	L150 x D95 x H420mm	Skimz SAP1200	7	up to 200 L	8034-00

SAFETY INSTRUCTIONS

Check that the voltage shown on the label of the pump corresponds to the voltage of the main supply.

Disconnect all electrical appliances from the main before placing your hands in the water.

The pump is protected against overheating. Never allow the pump to run dry.

MAINTENANCE

It is recommended to clean the pumps every 3 months. Check and clean the impeller, and if necessary soak the pump and impeller in white vinegar to dissolve any calcium deposits.

WARRANTY POLICY

Skimz Singapore LLP (Company) warrants this product to the original purchaser against defective material and workmanship that occurs during normal use of the body for two (2) years and one (1) year warranty on the pump. Company will, at Company's option, either repair or replace without charge.

PRODUCTS COVERED BY WARRANTY

All Skimz equipment is covered by warranty from the date of purchase. To be effective, register your product at: www.skimz.sg/support/register.html within 14 days of the product's purchase date.

Exclusions:

Damage resulting from accident, misuse, lack of reasonable care, subjecting the product to abnormal working conditions or any other failure not resulting from defects in materials or workmanship.

Damage caused by tampering, modification or attempted repair by anyone other than the Company.

Transfer of product to someone other than the original purchaser.

Bring the product to your nearest Skimz dealer or ship the product, together with a copy of the purchase receipt or other evidence of purchase to:

Skimz Singapore LLP

5 Ang Mo Kio Industrial Park 2A

#04-30 AMK Tech II

Singapore 567760

You must pay any postage, shipping charges, insurance costs and other expenses to return the product to Skimz. However, if the necessary repairs are covered by the warranty, Company will pay the return shipping charges.

This product is qualified in accordance with the respective regulations and guidelines and meet EC standards.




QUICK INSTALLATION GUIDE




PROTEIN SKIMMER Hang-on



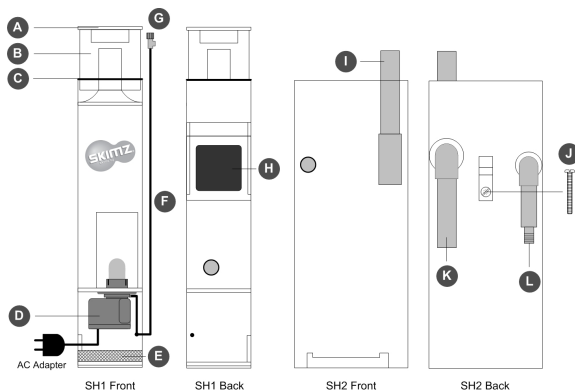

- A. Lid for collection cup
- B. Collection cup
- C. Adjustable O-ring
- D. Skimmer pump
- E. Sponge
- F. Air tube
- G. Adjustable air valve
- H. Magnetic mounting bracket
- I. Water outlet valve
- J. Nylon screw
- K. Water outlet
- L. Water inlet from feed pump

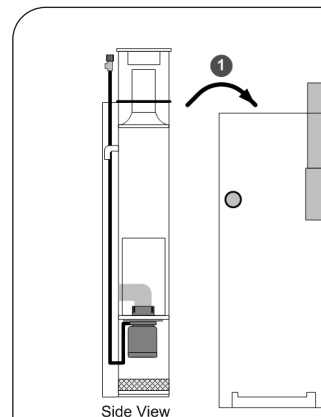


SH2 - STEP 1

1. Ensure that the Skimz SH1 protein skimmer is assembled correctly. Lift the SH1 skimmer and slide it into the SH2 hang-on housing.


SH1 - STEP 1

1. Insert the o-ring to the collection cup.
2. Place the collection cup 3/4 way into the skimmer body by adjusting the o-ring.
3. Slide the magnetic mounting bracket on the back of the skimmer. The magnetic mounting can be used for glass or acrylic up to 19mm thick.

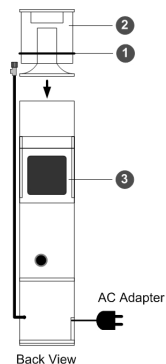


SH2 - STEP 2

1. Ensure that the SH1 is sitting correctly on the latch when you slide it in.
2. Dial the wedgpipe so that it is fully open. You can lift the wedgpipe from its fitting to check for proper positioning. Wedgpipe output allows you to adjust the water level in the SH2 hang-on housing and have fine control of the skimmer water level.

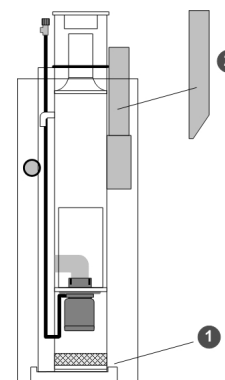

SH1 - STEP 2

1. Clean the surface both inside and outside where the position you want to install before you place the skimmer inside your aquarium.
2. Position the skimmer so that the aquarium water level is at the bottom of the collection cup.
3. Place the other magnetic mounting on the outside.
4. Start the skimmer pump. Watch the skimmer water level start to raise. Lift the collection cup upward until the skimmer water level as shown on the diagram.
4. Air intake can be adjusted via air valve. Set the air intake tap halfway and leave it to settle down for a day or so (initial break-in period).

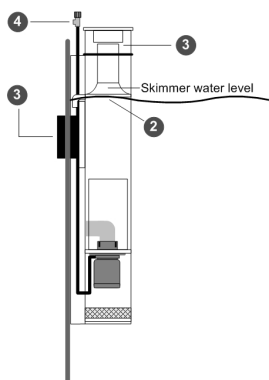

SH2 - STEP 3

1. After you hang the SH2 housing on your aquarium, tighten the nylon screw to secure it.
2. The SH2 must be supplied with water from the aquarium. Use a 600 l/h feed pump and connect using a hose to the SH2 inlet.
3. Start the feed pump. Dial the wedgpipe to control the water level in the SH2 housing. Verify that there aren't any leaks.
4. Start the skimmer pump. Watch the skimmer water level start to raise. Lift the collection cup upward until the skimmer water level as shown in SH1 - Step 2 diagram.
5. Air intake can be adjusted via air valve. Set the air intake tap halfway and leave it to settle down for a day or so (initial break-in period).

